

JumpSport® Elite



Save Time! Watch Install Videos for Tips, Shortcuts, and Updates at
www.JumpSport.com/Installation-Videos



10ft, 12ft, 14ft JumpSport Elite Replacement Net Assembly, Installation, Care, Maintenance, and Use Instructions

WARNING

**Read these materials prior to assembling and using this
Trampoline and Trampoline Enclosure**



DO NOT attempt or allow somersaults. Landing on the head or neck can cause serious injury, paralysis or death, even when landing in the middle of the trampoline jumping surface.



DO NOT allow more than one person on the trampoline. DO NOT allow more than one person inside the trampoline enclosure. Use by more than one person at the same time can result in serious injury.

Use trampoline only with mature, knowledgeable supervision.



DO NOT attempt to jump over the barrier.



DO NOT intentionally rebound off the barrier.

Retain address information for future use.

JumpSport, Inc.
1680 Dell Ave.
Campbell, CA 95008 U.S.A.

INS-P-21552-00D

NET-A-21388-00/NET-P-21389-00 (10ft.)


NET-A-21366-00/NET-P-21367-00 (12ft.)

NET-A-21354-00/NET-P-21342-00 (14ft.)

The maximum user weight is 240 pounds. This trampoline is not recommended for use by children under six years of age supervision of an adult, parent, or guardian present.

Patent info at: **Patents.JumpSport.com**
408-213-2551
www.jumpsport.com


Assembly and Installation Instructions

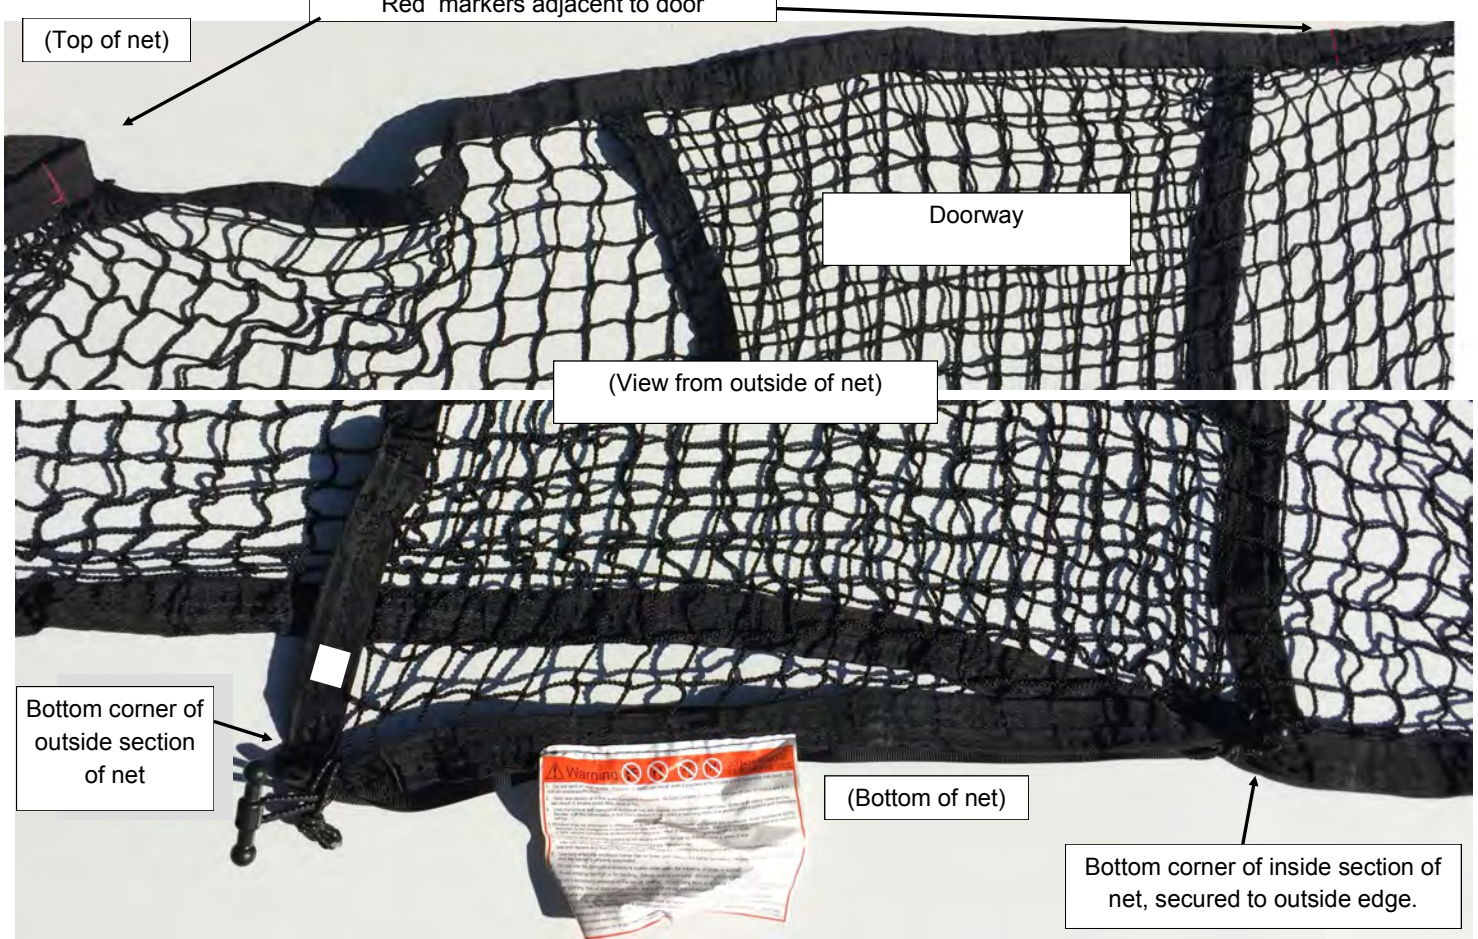

1) Familiarize yourself with the net.


- Find the top and the bottom of the net at the doorway. The top of the doorway will have overlapping panels of net sewn together. The bottom of the net will have one obvious corner.
- Now find the outside of the net. The outside of the net at the bottom corner will be free-hanging and will not be attached to anything. The inside corner will be secured to outside edge. The warning placard will also be attached to the outside panel of the net.
- You will start by attaching the top of net all the way around. Then you will finish by attaching the bottom.

12ft and 14ft trampolines have 8 enclosure poles while 10ft trampolines have 6 enclosure poles. The following installation pictures reference installation on 12ft and 14ft trampolines. On 10ft trampolines pole 6 will be in the position of pole 8 while pole 7 will not be present.

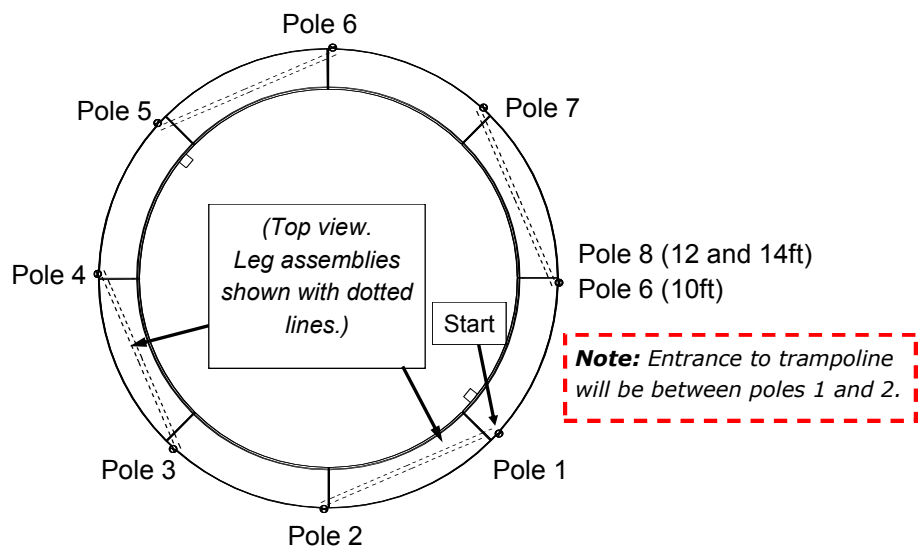

2) Identify where you want the door. It must be directly over a horizontal leg (example: pole 1 and pole 2 on the diagram above).

Assembly and Installation Instructions

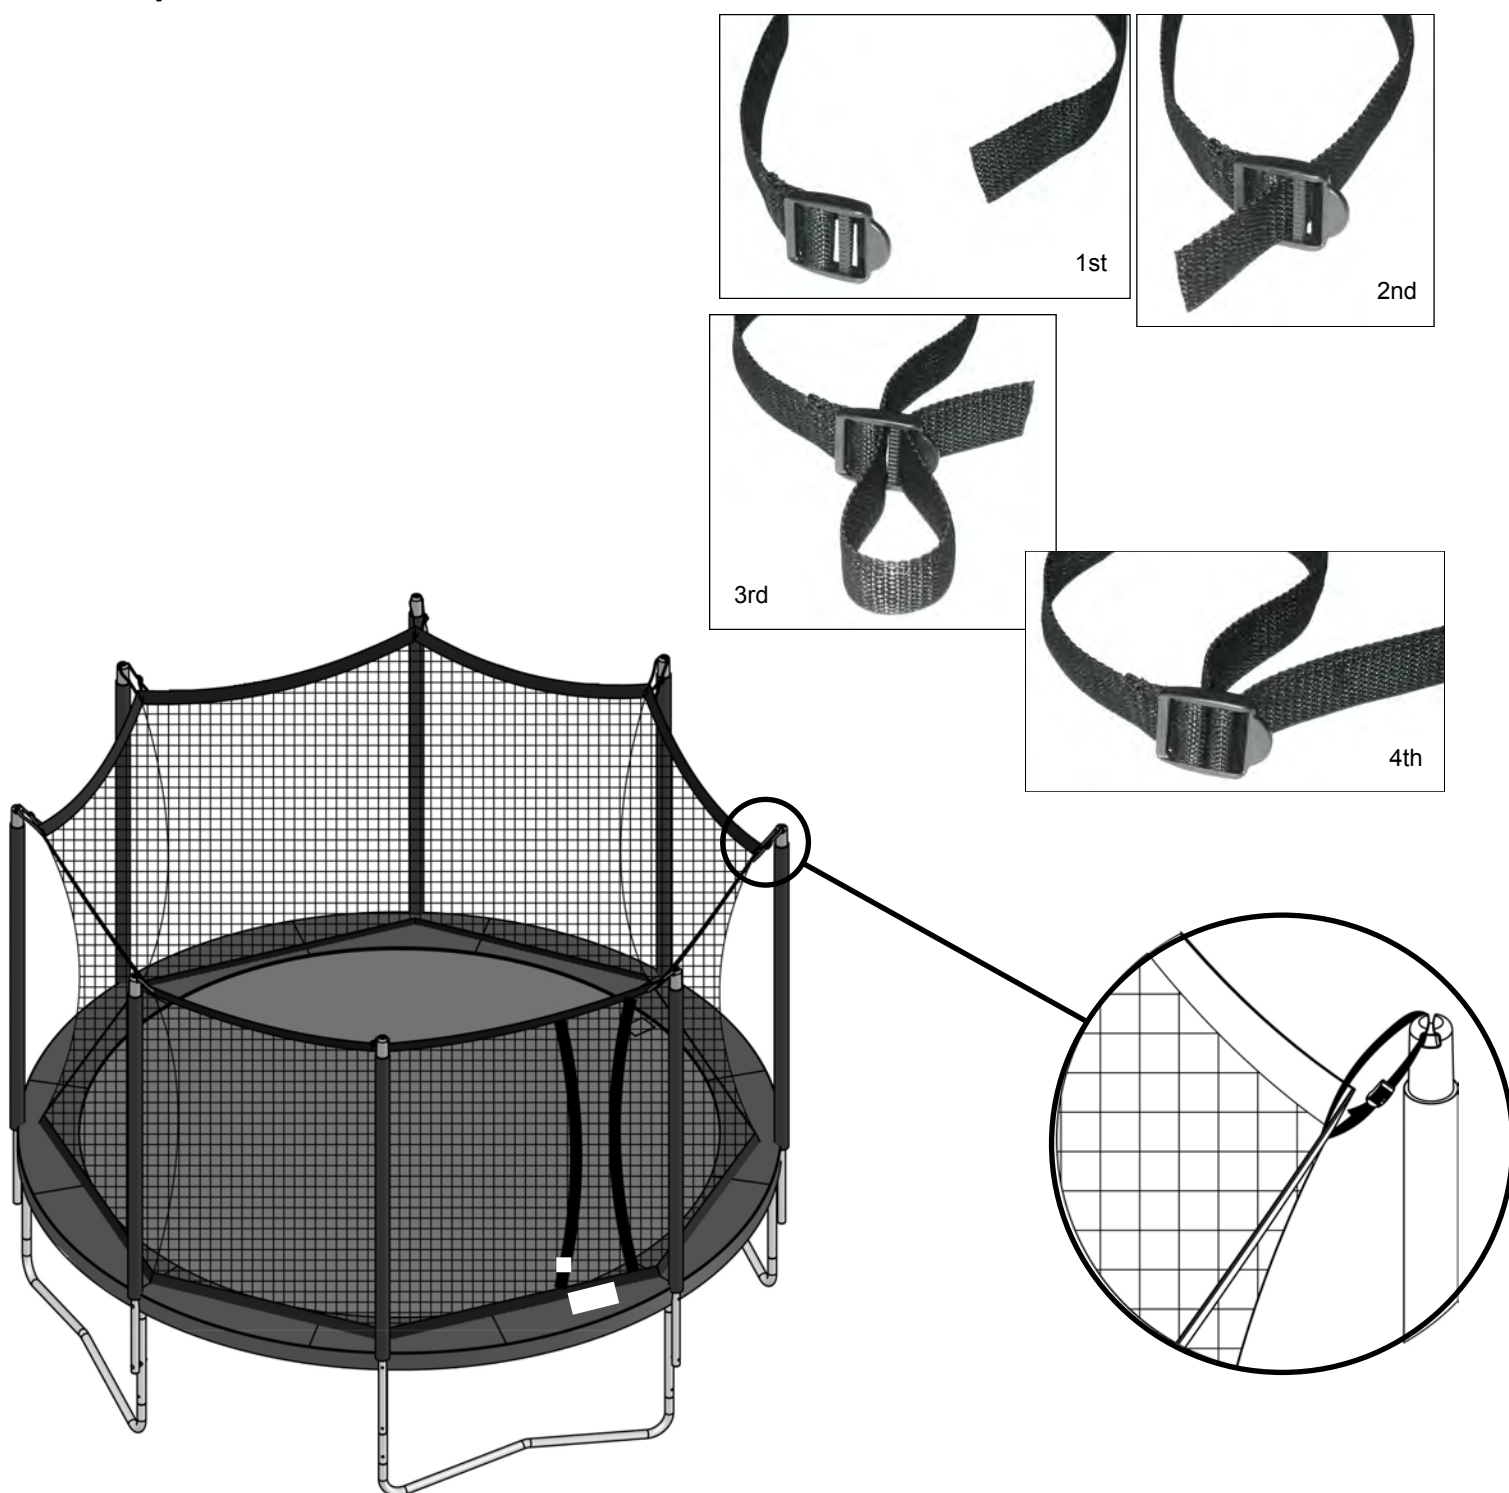


3) On the top of the net find a red marker adjacent to the doorway, and install a short strap through the net at this location. Feed the free end through the buckle so you have a generous loop. Repeat, installing short straps at the remaining 7 red marks for 12ft and 14ft trampolines and 5 red marks for 10ft trampolines.

Make sure the door is over a horizontal leg, the proper side is facing out (refer to diagram on page 2), and hang short straps on either side of the door into the slots on the caps (a ladder is strongly recommended). Hang the short straps at the remaining poles. Do NOT tighten short straps. Leave straps **loosely** connected for now.

IMPORTANT: For ease of adjustment and to prevent buckle from getting damaged, be sure the buckle is not on the inside of net. Buckle must be in-between pole and net.



Assembly and Installation Instructions

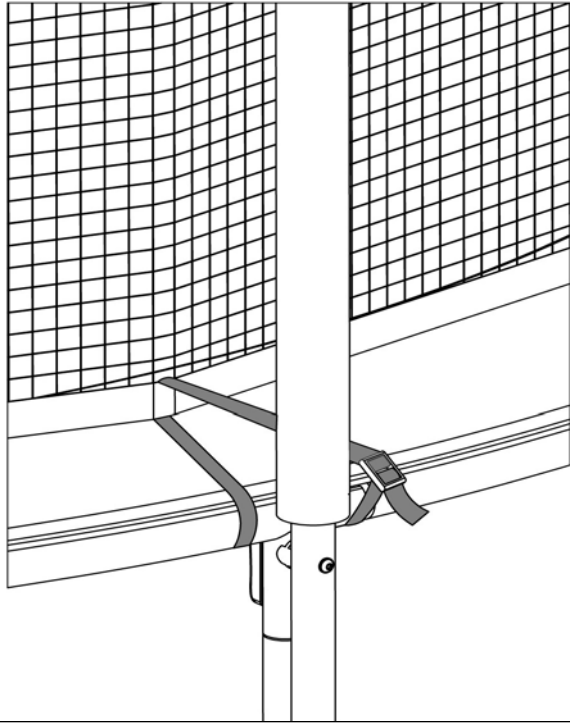

WARNING: If buckle is upside-down and strap is routed through it, strap will not hold. Attempt to pull strap out of buckle to be sure straps are secure. If strap pulls free, flip buckle over and reinstall strap.


4) On the bottom of the net, place a long strap with buckle through the grommet holes closest to Pole 2. Wrap the long strap *under* the leg of the trampoline and secure it **loosely**. The strap secures through buckle, as shown above.

>> Repeat this step at the remaining 7 poles for 12ft and 14ft trampolines and 5 poles for 10ft trampolines. It is important that you only secure the straps **loosely**; they will be tightened in a later step.

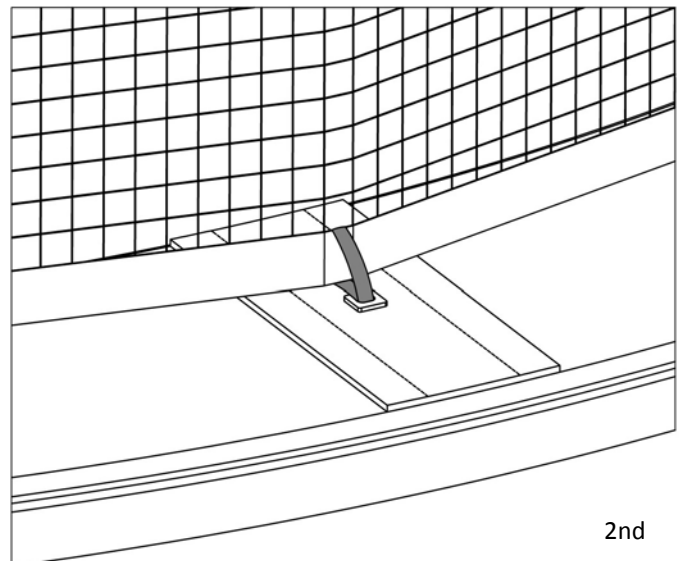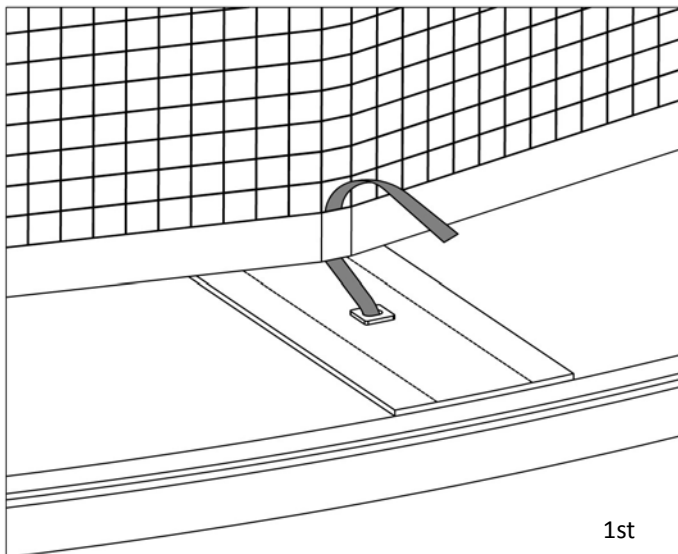

5) Directly between any 2 poles, the pad will have grommet holes. Straps will be used to secure the bottom of the net to the rail through these grommet holes. First, push a short strap with buckle up through both pad connector grommets and feed the short strap through a mesh hole in the bottom of the net. Second, feed the strap back down through pad connector grommets.


Assembly and Installation Instructions

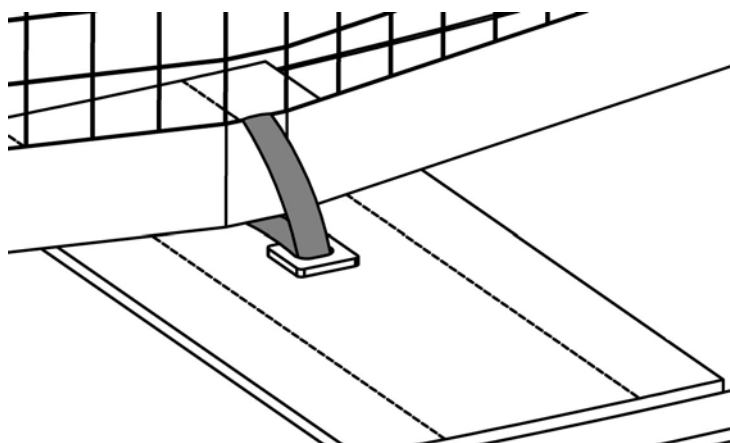

6) (You may need to lift up the frame pad for this step.) Wrap the end of the strap (the end without the buckle) over the top of the trampoline rail, and secure it **loosely** through the buckle underneath the rail.

>> Repeat steps 5 and 6 clockwise all the way around the trampoline at the remaining 7 locations for 12ft and 14ft trampolines and 5 locations for 10ft trampolines. It is important that you only secure the straps **loosely**; they will be tightened in step 8.

Assembly and Installation Instructions

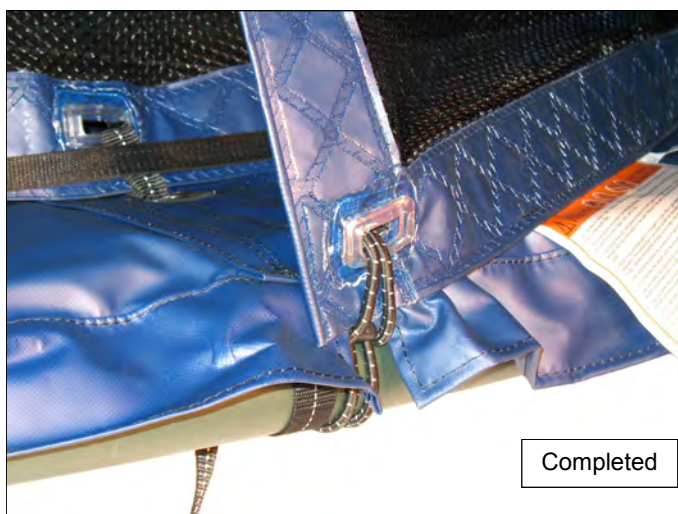

7) Pull the bottom corner of net toward pole 2. Lift the pad and secure button bungee t-anchor (pre-installed on the bottom corner of net) around the frame between poles 1 and 2.

8) Now it is time to secure all straps firmly. Tighten each short strap evenly to top of poles so the net is tensioned consistently around trampoline. Tighten the straps enough so the net is firm and doesn't sag but do not over tighten. Repeat this step for long straps at each of the lower poles and then for short straps between poles.