

Endurolast™ Bungee Cord Replacement Guide


To Remove Bungee Cords:

1. Grasp both ends of the bungee cord adjacent to the upper section of the bungee connector. (Picture 1)
2. Pull the bungee cord towards the center of the mat, away from the frame rail.
3. Lift the bungee cord up and away from the bungee connector. (Picture 2)
4. Hold the bungee connector in one hand, and using the other hand, grasp the bungee cord by one end. (Picture 3)
5. Pull the bungee cord out of the retaining slot in the bungee connector. (Picture 4)
6. Repeat step 4 with the other end of the bungee cord, on the other side of the bungee connector.

(Bungee Cords can be removed and replaced individually, or all at once. We recommend replacing every other one. This maintains proper centering and tension on the mat during the process)

To Insert New Bungee Cords:

1. Look at your rebounder manual to see how to select the bounce firmness. Once you have chosen the desired firmness, place one knotted end of the bungee cord next to the bungee connector. Hold the bungee connector in your hand, and using your thumb, squeeze the knot against the bungee connector while pulling down on the middle of the cord. This will snap the bungee cord into the retaining slot.
2. Repeat step 1 with the other knotted end of the bungee cord.
3. Find the middle of the bungee cord, and pull it under and around the frame rail to the top of the rebounder.
4. Pull the bungee cord towards the center of the mat, and loop it over the slot on the top of the bungee connector.
5. Repeat steps 1-4 until all bungees are replaced.

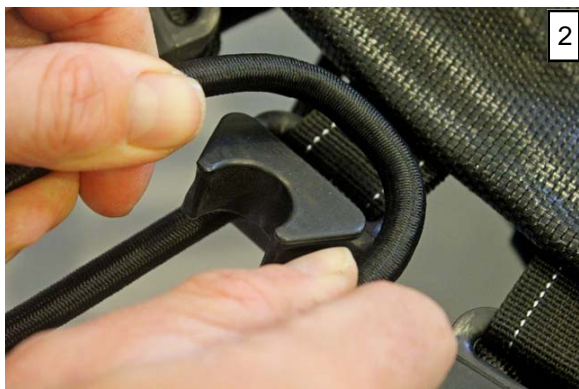

Retain address information for future use.

JumpSport, Inc.
2055 South 7th Street, Suite A
San Jose, CA 95112 U.S.A.

1-877-507-1399
www.jumpsportfitness.com



Covered by one or more of the following US Patents: No.6.840,891, No.D666,266, and No. D680,609. Other US and International Patents Pending.
Instruction Manual P/N: INS-P-xxxx-00A
Copyright © 2014, by JumpSport, Inc. All rights reserved.